



TD(07)046

9th Management Committee Meeting, Wien, Austria, October 1-2, 2007.

Cost/Revenue Optimisation of Multi-service Cellular Planning for Business Centre E-UMTS

Fernando J. Velez, Senior Member, Nuno Anastácio, Francisco Merca, Orlando Cabral

Instituto de Telecomunicações-DEM, University of Beira Interior
Calçada Fonte do Lameiro, 6201-001 Covilhã, Portugal

fjv@ubi.pt, nuno_rodolfo@netmadeira.com, francisco_merca@hotmail.com, ocabral@e-projects.ubi.pt

Abstract

An overview of All-IP Enhanced UMTS, E-UMTS, service needs in the business city centre, BCC, scenario is first presented. Then, E-UMTS traffic generation and activity models are described and characterised. System level simulations are carried out and the enhanced performance is demonstrated based in a single quality parameter, which simultaneously accounts for call blocking and handover failure probabilities. End-to-end delays do not present a limitation. By considering a grade of service of 1% for the quality parameter, and different hypothesis for costs and prices, an optimum coverage distance is obtained around ~295-480 m, which maximises the net revenue per km. However, results for the profit in percentage indicate that coverage distances in the range 520-565 m should be used in BCC E-UMTS.

Keywords

Cost/revenue optimisation, business city centre, cellular planning, Enhanced UMTS, system capacity.

Working Group 1 & 3

Cost/Revenue Optimisation of Multi-service Cellular Planning for Business Centre Enhanced

Fernando J. Velez, *Senior Member*, Nuno Anastácio, Francisco Merca, Orlando Cabral
Instituto de Telecomunicações, DEM - University of Beira Interior

Calçada Fonte do Lameiro
6201-001 Covilhã, Portugal

fjv@ubi.pt, nuno_rodolfo@netmadeira.com, francisco_merca@hotmail.com, ocabral@e-projects.ubi.pt

Abstract— An overview of All-IP Enhanced UMTS, E-UMTS, service needs in the business city centre, BCC, scenario is first presented. Then, E-UMTS traffic generation and activity models are described and characterised. System level simulations are carried out and the enhanced performance is demonstrated based in a single quality parameter, which simultaneously accounts for call blocking and handover failure probabilities. End-to-end delays do not present a limitation. By considering a grade of service of 1% for the quality parameter, and different hypothesis for costs and prices, an optimum coverage distance is obtained around ~295-480 m, which maximises the net revenue per km. However, results for the profit in percentage indicate that coverage distances in the range 520-565 m should be used in BCC E-UMTS.

Keywords — *Cost/revenue optimisation, business city centre, cellular planning, Enhanced UMTS, system capacity.*

I. INTRODUCTION

Enhanced UMTS, E-UMTS, is a UMTS evolution step which provides bit rates higher than 2 Mbit/s in the uplink and downlink directions over a 5 MHz frequency carrier. It enables the provision of new wideband services and a significant reduction of the price per bit, running over flexible Quality of Service, QoS, enabled IP based access and core networks, and making possible an effective end-to-end packet based transmission. European projects (e.g., IST-SEACORN [1]) have proposed a set of enhancements to UMTS, which include, among others, advanced modulation and radio transmission techniques, improved strategies for IP routing, and QoS assurance.

E-UMTS allows for expansion in both downlink and uplink directions. HSDPA for instance, a major part of the E-UMTS concept, mostly extends UMTS maximum achieved data rates for the downlink direction. Hence, E-UMTS supports wideband real-time/time-based mobile applications with a very high system capacity, and will set the ground for an initial introduction of actual broadband mobile applications, an important step towards 4G. E-UMTS can be a first step to achieve the goal of ubiquitous and seamless communications [2], scaling system capacity for mass-market services, which implies a capacity of the order of Gbps/km² will be available.

While, in the wireless LAN, WLAN, domain, high capacity is becoming possible with IEEE 802.11a, b, g, etc., in the mobile communications domain, E-UMTS will be a first step to achieve this goal. Furthermore, with the use of a

wider range of devices with various radio interfaces, E-UMTS will be the first 3.5G system to support values of capacity comparable to the ones needed for broadband mobile applications, and will allow for the introduction of the, Always Best Connected, ABC, concept [3], even before the introduction of OFDM/WCDMA and UWB systems for 4G. In this context, instead of being a competing technology, E-UMTS will be complementary to the various types of WLANs (and other radio and access technologies).

Since the enhancements proposed in E-UMTS have not yet been totally implemented, the only practical way to evaluate the effect of the proposed enhancements is by means of simulation. For that purpose a set of services needs to be used, in order to create a complete and realistic simulation framework, impacting directly on traffic generation models. These services will be accessed from a variety of operation environments each with its distinctive set of service preferences, usage patterns, and associated mobility profiles. As an answer to these services and environmental conditions a matching set of deployment strategies was studied, adapted, and simulated.

The usage of each application, i.e., the percentage of applications connections relative to the total number of active applications, is one of the most important aspects to be determined. These data, together with source traffic characterisation models, is essential for multi-service traffic analysis and engineering purposes, and simulations as well. A range of twenty-eight applications and eight deployment environments was first considered in SEACORN [4] for a complete scenario. This number was later integrated and condensed into a smaller but representative set of services and service environments to meet the technical demands of the simulation tools. Without this summarisation effort the framework proposed would pose considerable difficulties to implement due to the amount of computing resources it would require from simulators. A subset of services and environments are therefore selected in the business city centre scenario, and four services are finally used. Although it is possible to define several types of applications/services classifications for UMTS, this paper focuses the 3G QoS in the perspective of the UMTS Forum and 3GPP, which considers the following classes: conversational, streaming, interactive and background [5], distinguished by their delivery requirements and intrinsic time dependency.

Each simulation environment incorporates the suggested traffic mix, and the link layer enhancements. From them, results can be extracted that focus on the assessment of QoS support in E-UMTS. A system level simulator was developed building on the publicly available simulation framework ns-2 (network simulator, version 2). New

modules or additions to existing modules are developed to support the simulation of 3G and beyond UMTS and Enhanced UMTS networks. Representative performance evaluation results are presented to demonstrate how the system level simulator can be used for Enhanced UMTS performance evaluation and optimisation of network planning.

A cost/revenue function was developed taking into account the cost of building and maintaining the infrastructure, and the way the available resources in each cell affects operators' revenues. Fixed costs for licensing and bandwidth auctions (or 'beauty contests') should also be taken into account. The economic analysis is referred as a cost/revenue performance analysis, because optimising costs do not necessarily mean optimising net revenues.

This paper is organized as follows. Section II first presents the business city centre, BCC, scenario, including expected population density, and expected usage of service mix. The activity behaviour of each application is described, and a quality parameter is introduced. Section III introduces the parameters for system level simulations, and presents results for the quality of service, and throughput. By considering a threshold of 1% for the quality parameter, the supported throughput per km² and per BS is obtained as a function of coverage distance. In Section IV, after presenting the cost/revenue model and its parameters, optimisation results are obtained by having the net revenue and the profit in percentage into account. Finally, conclusions are drawn in Section V.

II. E-UMTS SCENARIOS AND TRAFFIC BEHAVIOUR

A. Application Mix

Although tens of applications can be considered in E-UMTS deployment scenarios [4], a reduced set of representative services and environments is required in order to meet the technical demands of the simulation tools. Without this summarisation effort the framework proposed would pose considerable difficulties to implement due to the amount of computing resources it would require from simulators.

As a result, in SEACORN three operation environments were considered with a mixture of four or five services each, depending on the environment: i) offices, OFF, an indoor scenario; ii) business city centre, BCC, the microcellular scenario which is addressed in this work, and iii) vehicular, VEH. In BCC the mobile units move along the streets, Fig. 1, and can change direction in crossroads following a certain probability. The position actualisation needs to be performed with some frequency, since pedestrian velocities are considered in this environment, an actualisation at each 5 m is reasonable. At each position actualisation, a velocity variation may occur according to a certain probability. A Manhattan topology with base stations, BSs, placed on crossings is often used to represent BCC scenarios, Fig 1.

This model consists of a rectangular grid composed of intersecting streets, characterised by homogeneous square buildings with, e.g., 200 meters length, and streets with 30 meters width. It is also characterised by small areas with skyscrapers and a large density of users with pedestrian

mobility [6]. The Radio Propagation model is the Walfisch propagation one [7], and omnidirectional antennas are used.

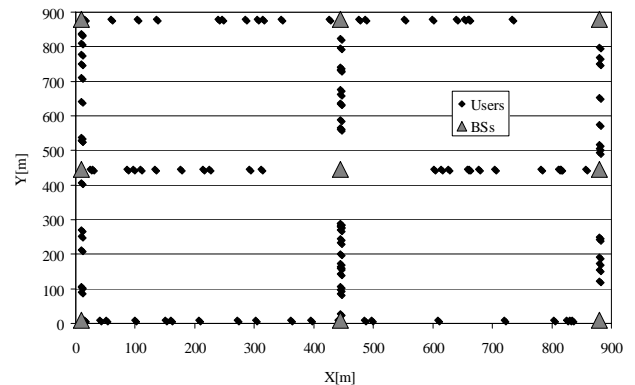


Fig. 1. Manhattan topology model.

Proposed applications and their relative usage are shown in Table I. This Table is obtained from scenarios with ten applications previously defined [8], by assuming, as a simplification, that the most significant application in that group. Applications in each class are VOI-voice, VTE-Video-telephony, MWB-Multimedia Web Browsing, and HDT-High Definition Video-telephony. Table II presents the service characteristics of these applications (TB-time based, NTB-non TB, RT-real time, NRT-non real time, Bid-bidirectional). In Table I, R_b represents the data rate for each considered application while the usage is the percentage of E-UMTS applications users for BCC scenarios [8].

The model for traffic mix defined for these environments generates traffic according to the predefined usage percentages, and assigns an application to each user accordingly. Each user has a probability to be active. This is determined by the Busy Hour Call Attempts (BHCA).

Session activity parameters describe the detailed aspects of traffic within a call. This is accomplished by means of an alternating active/inactive state model (ON/OFF). By defining an average duration of each period, together with an adequate statistical distribution (e.g., reflecting long-range dependence), the activity within a call can be modelled.

TABLE I
E-UMTS APPLICATIONS DATA RATE AND USAGE IN BCC.

Services and Applications	R_b [kb/s]	τ [min]	Usage [%]
Sound (e.g., VOI)	12	3	27
Multimedia (e.g., VTE)	144	3	16
Narrowband (e.g., MWB)	384	15	26
Wideband (e.g., HDT)	768	30	31

TABLE II
ENHANCED UMTS SERVICE CHARACTERISTICS [9].

Applications	Intrinsic time dependency	Delivery requirements	Directionality	Symmetry / Asymmetry
VOI	TB	RT	Bid	Sym
VTE	TB	RT	Bid	Sym
MWB	TB/NTB	RT	Bid	Asy
HDT	TB	RT/NRT	Bid	Asy

The model is based on population and service penetration values in order to determine call generation rates for the constituent services within each of the selected scenarios.

The activity within a call is modelled by defining an average duration of each active/inactive period, together with an adequate statistical distribution. The basic model for application data normally uses a Web session as a paradigm, although the model may be used for all types of data. A session is composed of a set of active periods made of packet sequences (packet calls) separated by inactivity periods. A packet call is a sequence or burst of packets, corresponding, e.g., to a Web page or other data item. Inactivity periods between packet call arrivals are often called reading or inactivity time. Table III describes average active versus inactive durations, and presents the statistical distributions of the active and inactive durations. VTE is a permanent application with average duration $\tau=3$ min.

TABLE III
APPLICATION ACTIVITY PARAMETERS.

Applications	Active state (ON)		Inactive state (OFF)	
	Avg.[s]	Distrib.	Avg.[s]	Distrib.
VOI	1.4	Expon.	1.7	Expon.
VTE	τ	Expon.	0	Expon.
MWB	5	Pareto	13	Pareto
HDT	60	Weibul	14	Pareto

B. Busy Hour Call Attempt

From the values of usage one is considering in SEACORN for the BCC scenario it is important to obtain, for each considered service, the values of the busy hour call attempts to be used in simulations. Busy hour call attempt represents in this case the total number of call attempts by all users considered in one simulation. They will correspond to the call attempts per unit time for the users covered by a radio cell or part of a cell.

$$BHCA_j = \frac{Usage_j}{\tau_j} \cdot M_T \cdot \rho, \quad (1)$$

where M_T is the number of users in the cell, τ_j is the average call duration, and ρ is the average traffic per user, which can vary from 0 to 1 Erl. From the values for usage from Table I and applications average duration, taking a given user population (e.g., $M_T = 100$), it is straightforward to obtain results for BHCA as a function of ρ , as it has a linear dependence.

C. Grade of Service for Quality

Quality of service parameters include upper limits for latency or end-to-end delay, bit error rate, BER, and frame erasure rate. The maximum allowed latency varies between 150 and 200 ms for voice and video-telephony applications (or even up to 500 ms for assistance in travel), and 2-10 s for Instant Messaging for Multimedia or Multimedia Web Browsing. While the maximum allowed BER is 10^{-4} for voice and video-telephony applications it decreases down to 10^{-6} for the remaining ones. Regarding FER, a limit of 1-3% was defined for VOI, VTE and HDT.

Grade of service, GoS, aspects include blocking and handover failure probabilities on which specific recommendations exist from ITU-T. Recommendation E.771 [10] proposes a limit of one percent blocking probability for future mobile systems, including the radio channel blocking probability. Concerning handover failure, a fixed value, independent of the cell size, can only be defined for call-dropping probability, P_d , which can nevertheless be easily related with handover failure probability. Half of the limit of blocking probability is proposed for P_d , i.e., one half of one percent (in order to provide ongoing calls with a higher degree of service quality). Some more tolerant figures concerning maximum blocking probability were used in 3G preliminary estimations [11], where an upper limit of two percent is used for call blocking. In this work, however, we consider a quality parameter, QP , that joins together the number of blocked setup attempts and handover failures in a unique QoS parameter [12]

$$QP = \frac{nb_blocked_call + 10 \cdot nb_interrupted_call}{total_nb_call} \quad (2)$$

The threshold assumed for QP is a GoS of 1%, i.e., $QP \leq 1$. A lower grade of service corresponds to a higher quality of service.

The maximum setup delay varies between 15-20 s for voice, video-telephony and assistance in travel applications, and 60 s for the remaining ones. It corresponds to the worst case of an international call setup. Local calls require a setup delay under 10 s [10].

Concerning such services as Multimedia (MM) Web Browsing, an important issue is the definition of a blocked call since they can be non-time-based services, and can therefore tolerate a longer delay, instead of blocking whenever resources are unavailable; hence, a longer maximum setup delay was defined for these services. A call attempt will be considered blocked whenever its maximum setup delay values are exceeded.

III. SYSTEM LEVEL SIMULATION AND SYSTEM CAPACITY

Due to the involved complexity, it is only possible to analyse the 3G/3.5G networks behaviour case by case, e.g., by using a simulation approach. The proposed scenarios were simulated in the event-based system level simulator developed within SEACORN by using the publicly available ns-2 simulation environment. Each simulation scenario is defined by a variety of parameters, including traffic, propagation and mobility models as well as topologies and user population. In the case of BCC, the parameters are the ones from Table IV.

The BCC scenario represents the system behaviour in a Manhattan geometry outdoor environment with microcells and omni directional antennas. Nine base stations were assumed, corresponding however to an equivalent area of five cells, Fig. 1. In the performed simulations, some parameters varied in order to study its influence on the system performance. These parameters include the number of user, M_T , and the distance between base stations (n.b., the dimensions of the covered area depends on the distance being therefore, variable).

TABLE IV
SIMULATION PARAMETERS FOR THE BCC SCENARIO.

Parameters	Values
Average user velocity	3km/h
Minimum velocity	0km/h
Direction update	5m
Probability to change velocity in position update	0.2
Probability to turn in a crossroad	0.5
Number of base stations	9
Distance between base stations	[135, 885]m
Cell coverage distance	[67.5, 442.5]m
BS Antenna	Omnidirectional
Maximum BS Tx power	13dBW
Antenna gain	0 dBi
Number of users	[556, 20000]
Interval between successive calls	0.005s
Simulation time	3600s

Based on the scenarios and traffic characterisation described in previous sections, system level simulations were carried out for different ρ s and R s by using different randomization to achieve more accurate results, and the enhanced performance is demonstrated in the downlink direction. The results were extracted by using our own scripts, developed in Java, and include call blocking and handover failure probabilities for the different classes of services, in a so-called “detailed services” approach. However, throughput, and end-to-end delays were extracted for the whole system.

The average over six simulation runs was computed for each metric presented below. Simulation lasted for a maximum of 3600 s of actual time but, in some cases, simulations crashed before it (mainly in cases with a heavy load). A reference geometry of 900x900 m was considered, and a population density of 6173 user/km² was assumed. As the coverage distance of cells varies, the simulated area also varied, and the number of users varied accordingly but keeping this fixed value for the density factor.

The computation of the most appropriate cell radius for each value of ρ , i.e., coverage distances corresponding to $QP=1\%$, is very important for the determination of system capacity. As an example, Fig. 2 presents the curves for P_b , P_{hf} and QP for the voice application, and the most appropriate cell radius is obtained for the coverage distance where QP achieves the value of 1%. Then, the minimum coverage distance among all applications is chosen and taken as the optimum coverage distance, R_{opt} , for a given ρ .

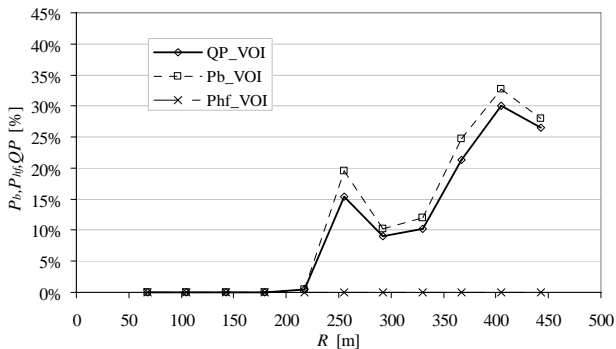


Fig. 2. Quality of service for voice, $\rho = 0.005\text{Erl}$.

Fig. 3 presents the curve for throughput for these values of R_{opt} and presents its intersection with the curves of system throughput (for each value of ρ , varying from 0.001 to 0.02 Erl) as well. This throughput corresponds to the geometry of nine cells presented in Fig. 1. Values for delay were below 25 ms, much lower than the 150 ms threshold.

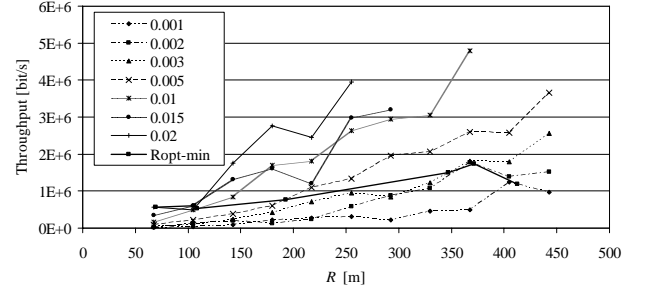


Fig. 3. Values of the throughput as a function of the optimum cell radius, with ρ as a parameter.

The throughput per cell is a measure of system capacity, and is obtained by dividing the system throughput by 5. The throughput per km² is obtained by multiplying the throughput per BS by the number of cell per km². A formula was obtained for its variation with R via a curve fit approach, Fig. 4. It is a decreasing function with R , and varies from ~6.0 Mbit/s down to ~400 kbit/s. However, this increasing behaviour while R decreases may not be advantageous if the cost of installing and maintaining extra BSs does not compensate.

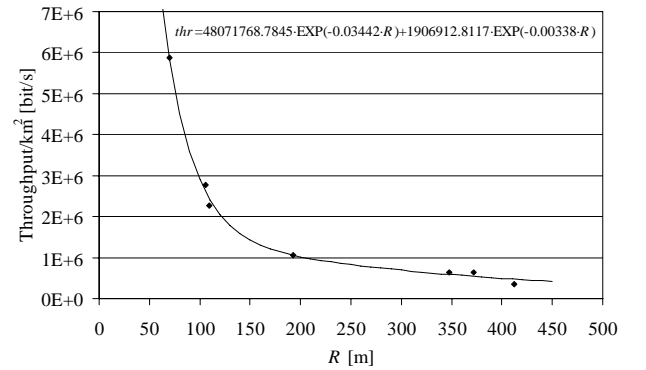


Fig. 4. Throughput per km2 as a function of the cell radius.

Fig. 5 presents the throughput per BS as a function of R (for $QP=1\%$).

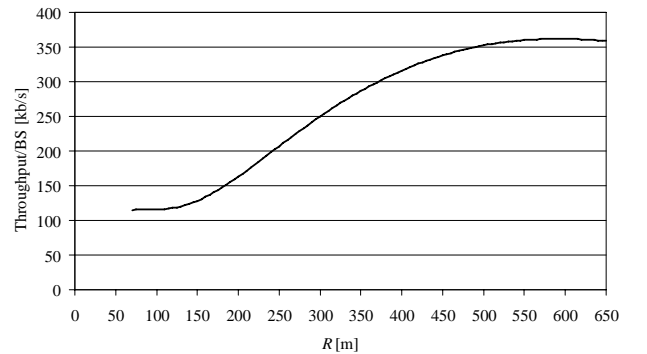


Fig. 5. Throughput per BS as a function of the cell radius.

Each BS achieves a maximum throughput of ~ 360 kb/s for $R \approx 610$ m. In the initial part of the curve, as the coverage distance increases the interference decreases. Then, for coverage distances higher than the one corresponding to the maximum throughput per BS, coverage problems arise.

IV. COST/REVENUE ANALYSIS

In this work, we consider the operator/service provider's point of view [13]. A cost/revenue function was developed for the BCC scenario, taking into account the cost of building and maintaining the infrastructure, and the way the number of channels available in each cell affects operators' revenues. Fixed costs for licensing and bandwidth auctions should also be taken into account. Although one considers a project duration of five years as a working hypothesis, one will analyse costs and revenues on an annual basis. Furthermore, the analysis is made under the assumption of null discount rate [14]. By no means is it intended to perform a complete economic study but only to present initial contributions. Appropriate changes would be needed to perform a complete economic analysis based on discounted cash flows (e.g., to compute the net present value).

The system costs includes a fixed term that represents the fixed costs, C_f , and one term proportional to the number of base stations, C_b (although there is a term proportional to the number of carrier of a base station, in this work, only one carrier is considered, and this is incorporated in C_b). The hypothesis for costs are presented in Table V.

TABLE V
HYPOTHESES FOR THE COST OF MICROCELLS.

Parameters	Hypothesis	
	2	3
Initial Costs:		
BS price, C_{BS} [€]	8000	3200
Installation, C_{Inst} [€]	2490	208
License fees, C_l [€/km ²]	1590	1590
Annual Cost:		
Operation and maintenance, $C_{M\&O}$ [€]	750	188

As the project lifetime is $N_{year} = 5$, the cost per BS is computed according to the following equation

$$C_b[\text{€}] = \frac{C_{BS} + C_{Inst}}{N_{year}} + C_{M\&O}. \quad (3)$$

The BCC scenario has a regular geometry (Manhattan) which allows for an analysis similar to the linear geometry. Hence, by using a 'linearised' approach which only considers one of the perpendicular streets [14], the total cost per unit of length is given by

$$C[\text{€/km}] = C_f[\text{€/km}] + C_b[\text{€}] \frac{1}{2R[\text{km}] - \frac{l[\text{km}]}{2}}, \quad (4)$$

where l is the street width of the Manhattan geometry. The annual revenue per unit of length is given by

$$R_v[\text{€/km}] = \frac{p[\text{€/kb}] \cdot Q_{cell}[\text{kb}]}{2R[\text{km}] - \frac{l[\text{km}]}{2}}, \quad (5)$$

where p represents the price per kb of data, and Q_{cell} the load supported by a cell during a year, which is obtained by

$$Q_{cell}[\text{kb}] = \frac{Thr_{[\text{kb/s}]} \cdot t_{BHCA}[\text{s}]}{N_{cells}}. \quad (6)$$

Note that $Q_{[\text{kb}]} = N_{cells} \cdot Q_{cell}[\text{kb}]$, where N_{cells} is the number of cells for the 'linearised' geometry.

The annual period corresponding to this busy hour call attempts, t_{BHCA} , is obtained by considering 6 equivalent busy hours per day during 240 days per year, i.e., 5184000 seconds per year.

The net revenue, R_n , is given by the difference between the revenues and the costs, in €/km, while the profit in percentage is given by the net revenue normalised by the cost, i.e.,

$$P_{ft} = \frac{R_v[\text{€/km}] - C_0[\text{€/km}]}{C_0[\text{€/km}]} \cdot 100[\%]. \quad (7)$$

By considering the hypothesis for prices per MB from Table VI, one obtained results for the net revenue, Figs. 6-7, and for the profit, in percentage, Figs. 8-9, for hypothesis 2 and 3 for costs, and for hypothesis A, B, and C for revenues.

In hypothesis 2, while the revenues decreases the optimum (maximum) for R_n moves from ~ 345 m to ~ 480 m.

TABLE VI
HYPOTHESES FOR THE PRICE PER MB.

Hypotheses	p [€/MB]
A	0.10
B	0.05
C	0.025

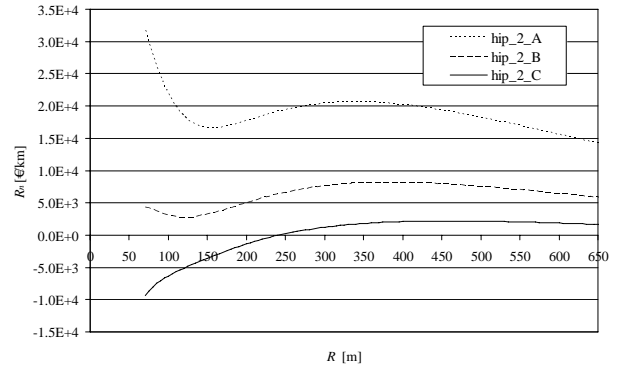


Fig. 6. Net revenue as a function of the cell radius, hypothesis 2.

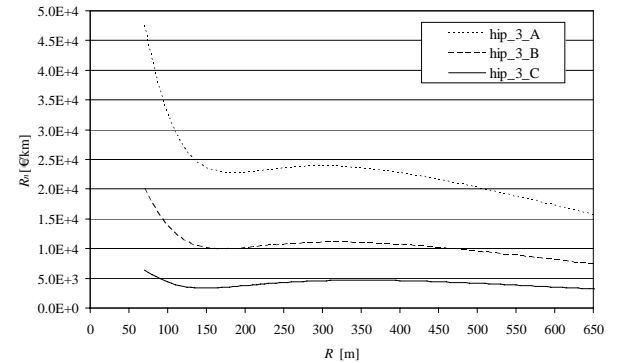


Fig. 7. Net revenue as a function of the cell radius, hypothesis 3.

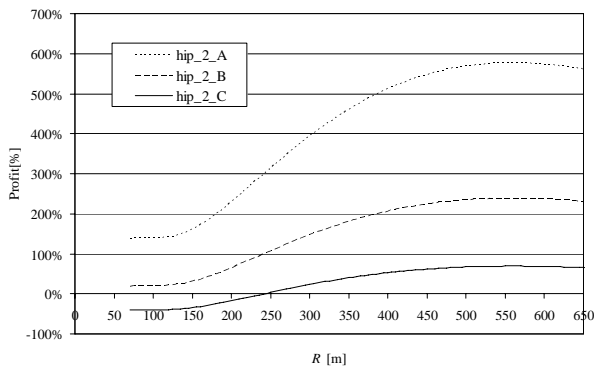


Fig. 8. Profit in percentage as a function of the cell radius, hypothesis 2.

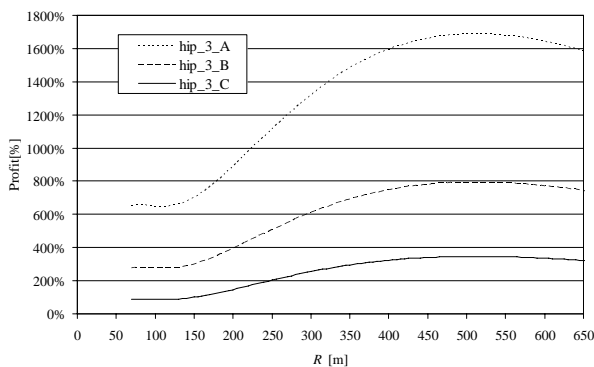


Fig. 9. Profit in percentage as a function of the cell radius, hypothesis 3.

In hypothesis 2, for a price of 0.10 €/MB the maximum of R_n is ~20 k€/km. In hypothesis 3, there is a similar behaviour, and maxima are obtained for ~295-350 m. For a price of 0.10 €/MB, the maximum of R_n is ~23 k€/km, and the increase relatively to hypothesis 2 is due to lower costs.

The maxima for the profit in percentage occur for values of R ~565 and ~520 m, for hypothesis 2 and 3, respectively. For a price of 0.10 €/MB, the profit takes values of 576% in hypothesis 2, and 1688% in hypothesis 3. The results clearly indicate that coverage distances of 520-565 m should be used to optimise E-UMTS by having into consideration the maximisation of the profit in percentage. However, if extra cells are needed to increase system capacity, lower coverage distances can be considered, maximising the absolute profit, i.e., the net revenue, for coverage distances lower than ~130.

V. CONCLUSIONS

Future 3.5G systems have to be able to support current applications as well as new ones, with different capacity and requirements. In this paper an All-IP Enhanced-UMTS is considered, where enhancements include link level behaviour, high-speed downlink packet access (HSDPA) channel, resource management and Diffserv architecture, and Radio Resource Management schemes. The BCC deployment and mobility scenario is considered, including expected population density, and usage of service mix. E-UMTS traffic generation and activity models, based on population and service penetration values, are also described and characterised.

System level simulations are carried out and the enhanced performance, including call blocking, handover failure probability, end-to-end delays, and throughputs in several deployment scenarios are demonstrated. By considering a quality parameter that simultaneously accounts for blocking and handover failure probabilities, and different hypothesis for costs and prices, an optimum coverage distance is obtained around ~295-480 m, which maximises the net revenue per km. However, results for the profit in percentage indicate that coverage distances in the range 520-565 m should be used in BCC E-UMTS.

ACKNOWLEDGMENTS

This work was partially funded by MULTIPLAN and CROSSNET (Portuguese Foundation for Science and Technology POSI and POSC projects with FEDER funding), by IST-UNITE, and by "Projecto de Reequipamento Científico" REEQ/1201/EEI/2005 (a Portuguese Foundation for Science and Technology project).

REFERENCES

- [1] <http://seacorn.ptinovacao.pt>
- [2] Dipankar Raychaudhuri, "Topics in 4G Wireless Networks: Ad-Hoc Nets, Adaptive Services & QoS," in *Proc. of WIRELESS, MOBILE and ALWAYS BEST CONNECTED 1st International ANWIRE Workshop*, Glasgow, UK, Apr. 2003.
- [3] Eva Gustafson and Annika Jonsson, "Always Best Connected," *IEEE Wireless Communications*, Vol. 10, No. 1, Feb. 2003, pp. 49-55.
- [4] Jaime Ferreira (Editor), *Enhanced UMTS deployment and mobility scenarios*, IST SEACORN CEC Deliverable 34900/PTIN/DS/013/b1, IST Central Office, Brussels, Belgium, 2002.
- [5] Nuno Anastácio, Francisco Merca, Orlando Cabral, Fernando J. Velez, "QoS Metrics for Cross-Layer Design and Network Planning for B3G Systems," in *Proc. of 3rd International Symposium on Wireless Communication Systems*, Valencia, Spain, Sep. 2006.
- [6] Jaime Ferreira (Editor), *Final Report on Traffic Estimation and Services Characterisation*, IST SEACORN CEC Deliverable 34900/PTIN/DS/014/d6, IST Central Office, Brussels, Belgium, 2003.
- [7] J. Antoniou, A System Level Simulator for Enhanced UMTS Coverage and Capacity Planning, MSc Thesis, Department of Computer Science, University of Cyprus, Nicosia, Cyprus, June 2004.
- [8] J. Ferreira and F.J.Velez, "Deployment Scenarios and Applications Characterisation for Enhanced UMTS Simulation", in *Proc. of 3G 2004 - 5th IEE International Conference on 3G Mobile Communication Technologies*, London, UK, Oct. 2004.
- [9] Eva R. San José and F.J. Velez, "Enhanced UMTS Services and Applications: a perspective beyond 3G", in *Proc. of EPMCC' 2003 - 5th European Personal Mobile Communications Conference*, Glasgow, Scotland, Apr. 2003.
- [10] ITU-T Recommendation E.771, Network grade of service parameters and target values for circuit-switched public land mobile services, 1996.
- [11] Study into Spectrum Requirements for UMTS Services, Final Report, Quotient Communications Ltd, Ovum Ltd, February 1998.
- [12] B. Walke, *Mobile Radio Networks and Protocols*, John Wiley and Sons, Chichester, England, UK, 2000.
- [13] B. Gavish and S. Sridhar, "Economic aspects of configuring cellular networks," *Wireless Networks*, Vol. 1, no.1, Feb. 1995, pp. 115-128.
- [14] F. J. Velez, L.M. Correia, "Optimisation of mobile broadband multi-service systems based in economics aspects", *Wireless Networks*, Vol. 9, No. 5, Sep. 2003, pp. 525-533.